

CURTAIN-BARRIER SENSOR

**A
L
A
R
M
S
Y
S
T
E
M
S**

BS-400


The BS-400 Slim Line Infra Red Transmitter & Receiver Barrier curtain Sensor is used for protecting internal/external doors & windows. The transmitter is used on one side of window/ Door and receiver is used on other side of Window/ Door. The BS-400 comes with 4 Beams of 105cms height. The working range of Barrier sensor is 8 meters (outdoor) to 16-meters (indoor).

This device is most suitable for:

- Indoor/outdoor perimeter security system.
- Window/Door. When the mounting space is limited.
- Internal/External protection/Terrace/Sliding door.



CE
Certified

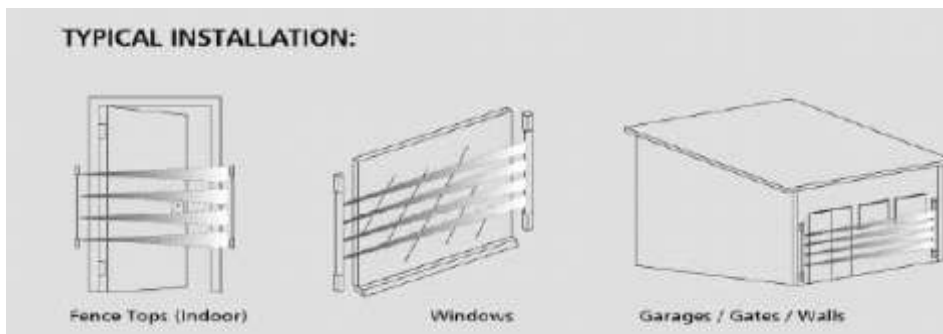

Features

- Aluminum housing/PC anti-UV cover/ABS side cap.
- LED alignment indicator.
- Cable wire or terminal block connection.
- Sensing range:8 meters (26 feet).
- Tx power adjustment: Normal/Strong.
- Anti-tamper circuit triggers alarm if power is cut or end cap is removed.
- N.O./N.C./Common relay output.
- Slim aluminum housing, anti high temperature/fog/rains.
- Alarm: Break one or two adjacent beam.
- L-brackets and mounting hardware included.

Technical Specifications

Model	BS-400			
Current drain	81mA			
Number of Beams	4			
Dimensions(mm)	35x30x570	35x30x1050	35x30x1524	35x30x2004
Range	25"(8m) outdoor, 50"(16m)indoor			
Operating Voltage	10 ~ 30 VDC			
Detection method	Simultaneous break of 2 adjacent beams or any single beam			
Output	NO./NC./COM relay output, 1A @ 120VAC / 24VDC			
Operating temp	-49°F(-45• Ž) ~ 131°F(+55• Ž)			
LED indicator	Red LED			
Green LED	(OFF): Aligned properly, (ON) Beam is broken (ON): Power ON, (OFF) Power OFF			
Enclosure / Case	IP65 / Al alloy			
Response time	Breakage of 1 beam: 2 sec Breakage of 2 adjacent beams: 0.5 sec			

Disclaimer: While all efforts are made to maintain accuracy, the technical specifications and graphics may have inaccuracies or typographical errors. Kawach may make improvements and/or changes in any brochure at any time, without notice. The manufacturer may also change the design / specifications of the product at any time. Kawach can not be held responsible for any loss caused by the above information. For latest updates, please contact us and visit our website: www.kawach.com