



**For Security
Vari-Focal**

Applicable camera (model)


YV10×5R4A-2

1	2/3	1/2	1/3	1/4
---	-----	-----	-----	-----

10×



VARI Vari-Focal	WIDE Wide Angle	TELE Telephoto Long Focal	Day~ Night Day & Night	MANUAL Manual Iris	CS-mt CS Mount	METAL Metal Mount
					AT Aspherical Lens	F1.6 Wide Aperture Rate

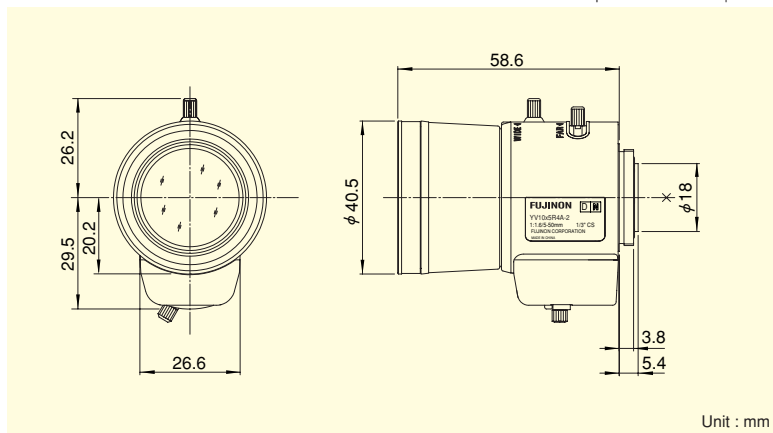

- Advanced design engineering and special optic glass adopted, best suited for color, Black and White and Day and Night cameras.
- Wide range of f5-50mm, supporting various applications.
- Wide aperture of F1.6, optimizing the performance at low lighting intensity.
- High accuracy aspheric lens adopted, achieving the high quality image.

VARI-FOCAL LENSES

Fixed Focal (mm)			5~50 (10×)
Iris Range			F1.6 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/3"	WIDE	51°17' × 39°36'
		TELE	5°30' × 4°07'
	1/4"	WIDE	39°36' × 30°13'
		TELE	4°07' × 3°06'
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	304 × 228
		TELE	54 × 41
	1/4"	WIDE	228 × 171
		TELE	41 × 31
Back Focal Distance (in air) (mm)			7.52
Exit Pupil Position (From Image Plane) (mm)			-43
Filter Thread (mm)			—
Mount			CS
Mass (g)			80
Remarks		•With Metal Mount	