


## UC-280

The UC-280 is an 8-zone interface linking JA-60 wireless detectors with hard-wired security control panels. It can also send triggering signals to a JA-60A wireless outdoor siren and/or UC-216 and UC-222 universal receivers.

Additionally, it can receive signals from Jablotron RC-xx remote controls. If necessary, UC-282 expander modules can be used to increase the number of zones up to 40.

### Technical Specifications

Power	12 V DC (10.5 V - 16.0 V)
Power consumption	typ. 50 mA (all relays off) max. 150 mA
Zone outputs	Z1-Z8 8 relays 50 mA / 50 V with COM1 common terminal
Tamper, fault, battery outputs	3 relays 50 mA / 50 V with COM2 common terminal
X, Y and Siren inputs	activated when switched to GND (filter 0.2 sec., 3 V DC triggering level)
Working range with	JA-60 100 m (open area)
Working range with	RC 30 m (open area)
Working environment	indoor use (class II, EN 50131-1)
Operating temperatures	-10 °C to +70 °C
Operating humidity	max. 90 %
Dimensions	188 x 135 x 40 mm
Weight	800 g

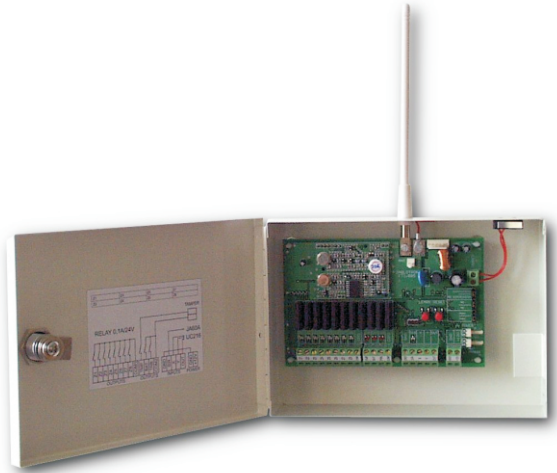

**Complies with  
EN 50131-1**