




**For Security  
Vari-Focal**

# YV10×5B-2

Applicable camera (model)




**10×**



**VARI** Vari-Focal   
 **WIDE** Wide Angle   
 **TELE** Telephoto Long Focal   
 **MANUAL** Manual Iris   
 **CS-mt** CS Mount   
 **METAL** Metal Mount   
 **AT** Aspherical Lens  
**F1.3** Wide Aperture Rate

- Telephoto, wide range vari-focal lens with the horizontal field angle of 51-5 degrees (when used on 1/3 cameras).
- Wide range of f5-50mm, supporting various applications.
- Wide aperture of F1.3, optimizing the performance at low lighting intensity.

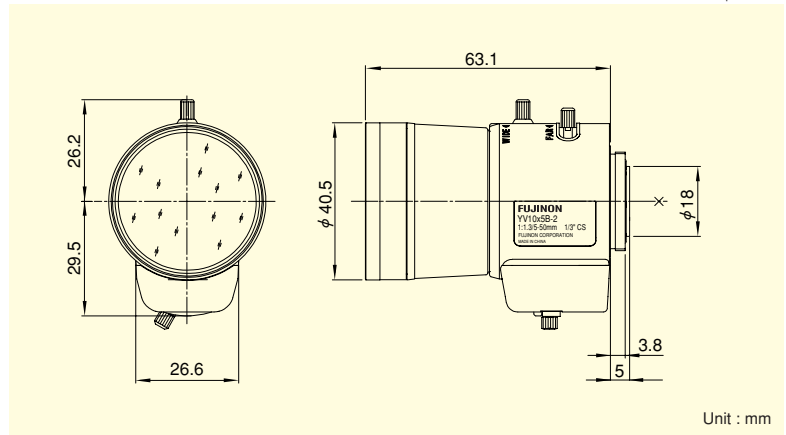

VARI-FOCAL LENSES

Focal Length (mm)			5~50 (10×)
Iris Range			F1.3 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/3"	WIDE	51°59' × 39°12'
		TELE	5°24' × 4°05'
	1/4"	WIDE	39°12' × 29°30'
		TELE	4°05' × 3°05'
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	315 × 230
		TELE	62 × 47
	1/4"	WIDE	230 × 170
		TELE	47 × 35
Back Focal Distance (in air) (mm)			10.83
Exit Pupil Position (From Image Plane) (mm)			292
Filter Thread (mm)			—
Mount			CS
Mass (g)			95
Remarks		•With Metal Mount	