




**For Security
Vari-Focal**

Applicable camera (model)

YV5×2.7R4B-2




5x



VARI Vari-Focal
 WIDE Wide Angle
 TELE Telephoto Long Focal
 Day~Night Day & Night
 MANUAL Manual Iris
 CS-mt CS Mount
 METAL Metal Mount
AIT Aspherical Lens
F1.3 Wide Aperture Rate

- Advanced design engineering and special optic glass adopted, best suited for color, Black and White and Day and Night cameras.
- Wide range of f2.7-13.5mm, supporting various applications.
- Wide aperture of F1.3, optimizing the performance at low lighting intensity.
- High accuracy aspheric lens adopted, achieving the high quality image.

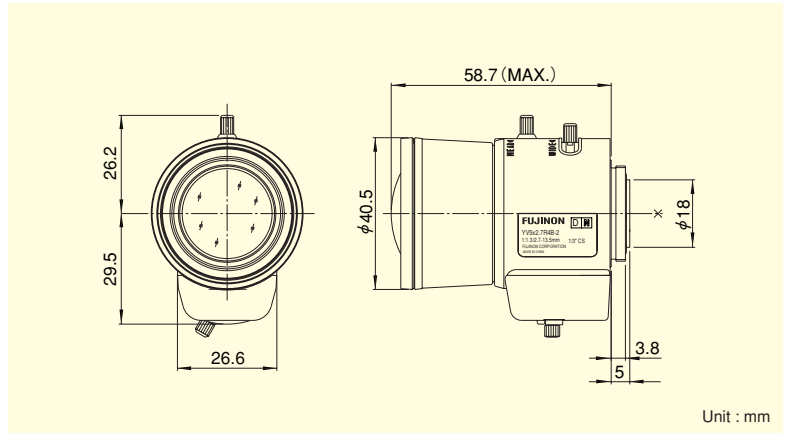

VARI-FOCAL LENSES

Fixed Focal (mm)			2.7~13.5 (5x)
Iris Range			F1.3 ~ Close
Operation	Zoom		Manual
	Focus		Manual
	Iris		Manual
Angle Of View (H×V)	1/3"	WIDE	99°42' × 74°17'
		TELE	20°37' × 15°30'
	1/4"	WIDE	74°17' × 55°26'
		TELE	15°30' × 11°38'
Focusing Range (From Front Of The Lens) (m)			∞ ~ 0.3
Object Dimensions at M.O.D. (H×V) (mm)	1/3"	WIDE	741 × 473
		TELE	115 × 86
	1/4"	WIDE	473 × 328
		TELE	86 × 64
Back Focal Distance (in air) (mm)			8.91
Exit Pupil Position (From Image Plane) (mm)			96
Filter Thread (mm)			—
Mount			CS
Mass (g)			65
Remarks		•With Metal Mount	